

DESCRIPTION

CATALOG: E-750-U-260	BALLAST TYPE: Electronic	STARTING METHOD: Instant Start	NUMBER OF LAMPS – LAMP TYPE: 1 - F96T12, 2 - F96T12
--------------------------------	-----------------------------	-----------------------------------	--

ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE: 120 - 277 V~ ±10%	LAMP WATTS: 60/75 w	INPUT WATTS: 134 w	INPUT CURRENT: 1.12/0.5 A	OCV: 660 v	PF: > 0.97	FREQUENCY: 50/60 Hz	SOUND RATED: A
MIN START TEMP: 32°F / 0°C	CLASS: P	TYPE: 1 outdoor	BALLAST FACTOR: 0.86	BEF: 0.64	LAMP CONNECTION: PARALLEL	THD (1): < 19%	NO PCB'S

(1) FOR 2-F96T12

PHYSICAL CHARACTERISTICS

CASE DIMENSIONS						
UNITS	M1	M2	M3	W	L	H
INCHES	2.0	11.14	10.5	3.11	11.75	1.78
TOL(+/-)	0.01	0.03	0.01	0.05	0.10	0.08
MM	51	283	267	79	298	45
TOL(+/-)	0.25	0.8	0.25	1.3	2.50	2.00
LEAD LENGTH						
UNITS	BLACK	WHITE	RED	BLUE	BLUE	
INCHES	22	22	57	47	47	
TOL(+/-)	3/8	3/8	3/8	3/8	3/8	
MM	559	559	1448	1194	1194	
TOL(+/-)	10	10	10	10	10	

CARTON CHARACTERISTICS

UNITS/CARTON 6	CARTONS/LAYER 12	# OF LAYERS 8	UNITS/PALLET 576	PIECE WEIGHT 3.74 lbs	CARTON WEIGHT 23 lbs	PALLET WEIGHT 2,285 lbs
CARTONS/PALLET 96	CARTON DIMENSIONS 12" x 12" x 4"	PALLET DIMENSIONS 40" x 48" x 7"	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET 40" x 48" x 40"			

MISC.

--

CARTON LABEL

ISB SOLA BASIC®

CAT. E-750-U-260

UNIVERSAL VOLTAGE 120/277

1.120/0.500 A


50/60 Hz

UNITS 6

FOR 1 or 2 LAMPS F96T12 or F96T12/SS or F72T12 or F48T12 or F48T12/SS

INSTANT START ELECTRONIC BALLAST

ELECTRICAL DIAGRAM

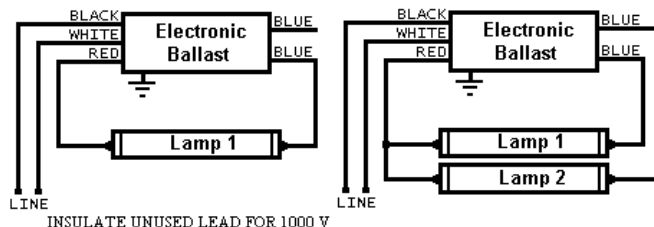

PRODUCT LABEL

SOLA

UNIVERSAL VOLTAGE 120/277 V~ 1.120/0.500 A 660 OCV 50/60 Hz

INSTANT START ELECTRONIC BALLAST

E-750-U-260

HIGH POWER FACTOR

VOLTAGE TO GROUND <600 V~

FOR 1 OR 2 LAMPS F96T12, F96T12/SS, F75T12, F48T12, F48T12/SS

SOUND RATED A

5 YEAR WARRANTY

G07

MINIMUM 0°C

MADE IN MEXICO

CLASS P

INHERENT THERMAL PROTECTION

TYPE 1 OUTDOOR

CAUTION: HAZARDOUS VOLTAGE EXISTING BEFORE INSTALLING OR REPLACING. INSULATE UNUSED LEAD FOR 1000 V.



ISO 9001:2000



SOLA CANADA
LIGHTING & POWER

171 Ambassador Drive
Units 8 & 9
Mississauga, ON
L5T 2J1

Phone: 905-670-0746
Fax: 905-670-9689
www.solacanada.com

Data is based upon tests performed by Industrias Sola Basic in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

Made in Mexico by Industrias Sola Basic S.A. de C.V.