


CATALOG NUMBER: E-MCA0FT175F FOR ONE 175 WATT, M57 OR H39 METAL HALIDE LAMP

Line Voltage	120/277V
Regulation	
Line Volts	+/- 10%
Line Watts	+/-10%
Frequency	60 Hz
Circuit Type	CWA
Power Factor (min)	90%
Insulation Class	A(105°)
Min. Ambient Starting Temp.	-20° F or -30° C

Line Voltage (Volts)	120	277
Line Current (Amps)		
Operating	1.75	0.75
Open Circuit	1.75	0.75
Starting	1.09	0.48
Input Watts (W)	205	205
Open Circuit Voltage (V)	310	310
Drop Out Voltage (V)	66	152
UL(1029) Bench Top Rise	A	A
Recommended Fuse (Amps)	5	3


HIGH POTENTIAL TEST (VOLTS)

1Minute	2000
2 Seconds	2500
Open Circuit Voltage Test(volts)	280-340
Short-Circuit Current Test (Amps)	
Secondary Current	1.5 - 1.80
Input Current (Amps)	0.70 - 0.30 - 1.15 0.50

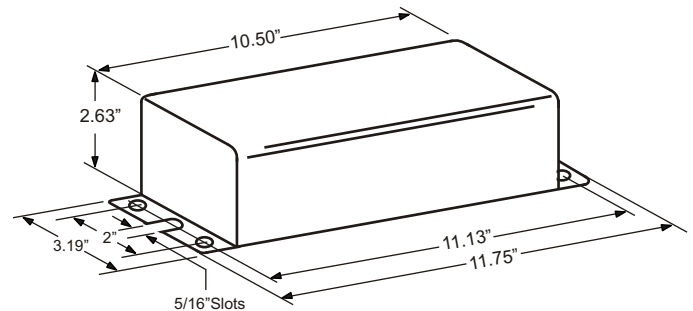

Weight (Lbs)	13.00
Lead lengths (Inches)	12.00
Sound rating	B

WIRING DIAGRAM

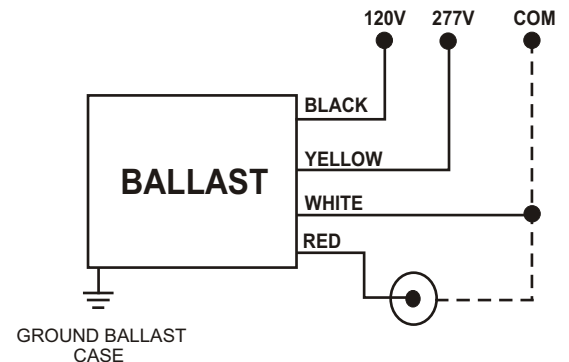

120/277 VOLT CONNECTION

Data is based upon tests performed by Industrias Sola Basic in a controlled environment and representative of relative performance. Actual Performance can vary depending on operating conditions. Specifications are subject to change without notice.



Made in Mexico by Industrias Sola Basic S.A de C.V.

SOLA CANADA
LIGHTING & POWER

171 Ambassador Drive
Units 8 & 9
Mississauga, ON
L5T 2J1

Phone: 905-670-0746
Fax: 905-670-9689

www.solacanada.com