



CATALOG NUMBER: E-SZA00W50 FOR ONE 50 WATT, S68 HIGH PRESSURE SODIUM LAMP


Line Voltage	120/208/240/277V
Regulation	
Line Volts	+/- 5%
Line Watts	WITHIN TRAPEZOID
Frequency	60 Hz
Circuit Type	HX-HPF
Power Factor (min)	90%
Insulation Class	H(180°)
Min. Ambient Starting Temp.	-40° F or -40° C

Line Voltage (Volts)	120	208	240	277
Line Current (Amps)				
Operating	0.60	0.35	0.30	0.26
Open Circuit	1.05	0.60	0.52	0.45
Starting	0.65	0.37	0.33	0.30
Input Watts (W)	68	68	68	68
Open Circuit Voltage (V)	120	120	120	120
Drop Out Voltage (V)	96	165	190	222
UL(1029) Bench Top Rise	A	A	A	A
Recommended Fuse (Amps)	3	2	1	1
HIGH POTENTIAL TEST (VOLTS)				
1 Minute	2000			
2 Seconds	2500			
Open Circuit Voltage Test (volts)	115-135			
Short-Circuit Current Test (Amps)				
Secondary Current	1.3 - 1.7			
Input Current (Amps)	0.50 - 0.65	0.28 - 0.40	0.24 - 0.35	0.21 - 0.30


BRACKET CORE & COIL MOUNTING BRACKET

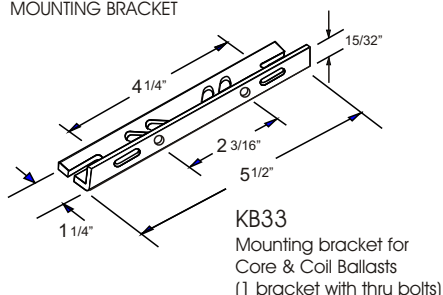

C-01
MOUNTING CLIP for round case (Furnished as standard with B suffix ballast)




I-01
MOUNTING CLIP for oval case (Furnished as standard with B suffix ballast)

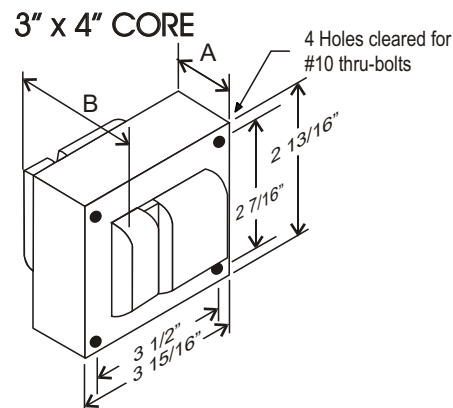

CORE AND COIL


Dimension A (inches)	1.00
Dimension B (inches)	2.20
Weight (Lbs)	5.00
Lead Lengths (inches)	12

CAPACITOR

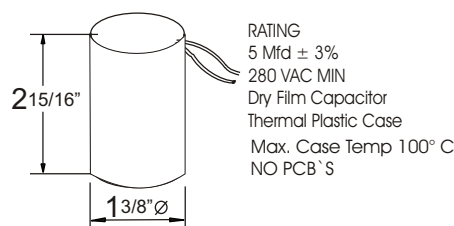


IGNITOR 37-63-AS-9.1-N7

Ballast to Lamp Distance (BTL): 2 feet

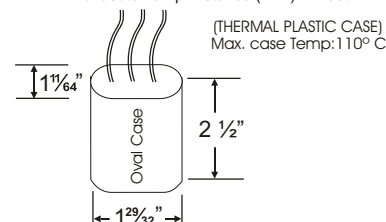

WIRING DIAGRAM

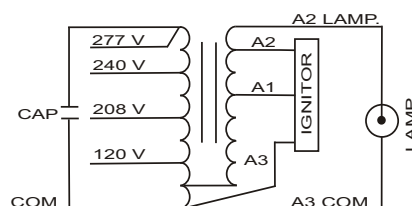

120/208/240/277 VOLT CONNECTION

Data is based upon tests performed by Industrias Sola Basic in a controlled environment and representative of relative performance. Actual Performance can vary depending on operating conditions. Specifications are subject to change without notice.



Certificate No. 006281



Made in Mexico by Industrias Sola Basic S.A de C.V.

SOLA CANADA

LIGHTING & POWER

171 Ambassador Drive
Units 8 & 9
Mississauga, ON
L5T 2J1

Phone: 905-670-0746
Fax: 905-670-9689

www.solacanada.com