

CATALOG NUMBER: E-MIADDZ250 FOR ONE 250 WATT, M58 METAL HALIDE LAMP

Line Voltage	480/600V
Regulation	
Line Volts	+/-10%
Lamp Watts	+/-10%
Frequency	60 Hz
Circuit Type	CWI
Power Factor (min)	90%
Insulation Class	H(180°)
Min. Ambient Starting Temp.	-20° F or -30° C



Line Voltage (Volts)	480	600
Line Current (Amps)		
Operating	0.65	0.52
Open Circuit	0.52	0.41
Starting	0.22	0.18
Input Watts (W)	292	292
Open Circuit Voltage (V)	300	300
Drop Out Voltage (V)	260	315
UL(1029) Bench Top Rise	C	C
Recommended Fuse (Amps)	2	2

HIGH POTENTIAL TEST (VOLTS)

1 Minute	2000
2 Seconds	2500
Open Circuit Voltage Test(volts)	275-325
Short-Circuit Current Test (Amps)	
Secondary Current	2.3 - 2.6
Input Current (Amps)	0.12 - 0.10 - 0.22 0.17

BRACKET


CORE & COIL
MOUNTING BRACKET

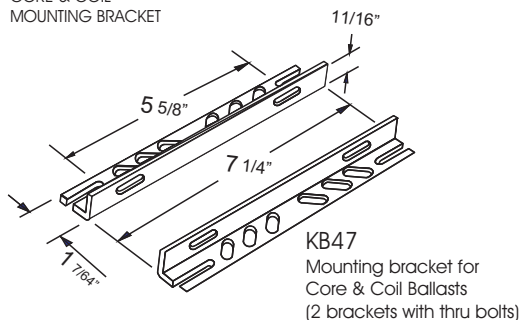

C-01

MOUNTING CLIP for round
case (Furnished as standard
with B suffix ballast)


4 1/4" x 4 3/4" CORE

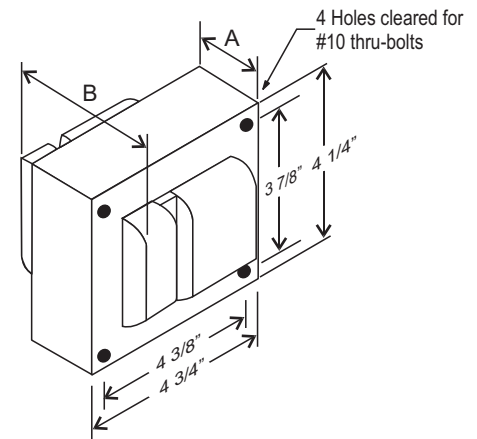

CORE AND COIL


Dimension A (inches)	1.80
Dimension B (inches)	3.55
Weight (Lbs)	12.0
Lead Lengths (inches)	12

CAPACITOR



RATING
12 Mfd ± 3%
480 VAC MIN
Dry Film Capacitor
Thermal Plastic Case
Max. Case Temp 100° C
NO PCB'S

WIRING DIAGRAM

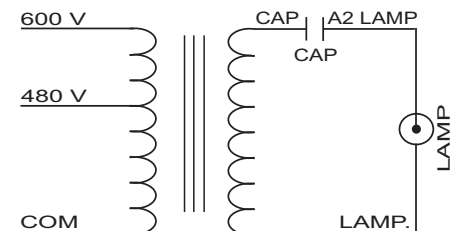

480/600 VOLT CONNECTION

Data is based upon tests performed by Industrias Sola Basic in a controlled environment and representative of relative performance. Actual Performance can vary depending on operating conditions. Specifications are subject to change without notice.

ISO 9001:2000



SOLA CANADA
LIGHTING & POWER

171 Ambassador Drive
Units 8 & 9
Mississauga, ON
L5T 2J1

Phone: 905-670-0746
Fax: 905-670-9689

www.solacanada.com

Made in Mexico by Industrias Sola Basic S.A de C.V.