

CATALOG NUMBER: E-MIAJDDZ1000 FOR ONE 1000 WATT, M47 METAL HALIDE LAMP



Line Voltage	347/480/600V
Regulation	
Line Volts	+/-10%
Lamp Watts	+/-10%
Frequency	60 Hz
Circuit Type	CWI
Power Factor (min)	90%
Insulation Class	H(180°)
Min. Ambient Starting Temp.	-20° F or -30° C

Line Voltage (Volts)	347	480	600
Line Current (Amps)			
Operating	3.32	2.40	1.92
Open Circuit	2.25	1.62	1.30
Starting	1.45	1.05	0.83
Input Watts (W)	1100	1100	1100
Open Circuit Voltage (V)	410	410	410
Drop Out Voltage (V)	190	260	315
UL(1029) Bench Top Rise	F	C	B
Recommended Fuse (Amps)	8	6	5

HIGH POTENTIAL TEST (VOLTS)	
1 Minute	2000
2 Seconds	2500
Open Circuit Voltage Test(volts)	375-460
Short-Circuit Current Test (Amps)	
Secondary Current	5.2 - 6.0
Input Current (Amps)	1.02 - 1.52 0.81 - 1.10 0.64 - 0.90


BRACKET

CORE & COIL
MOUNTING BRACKET

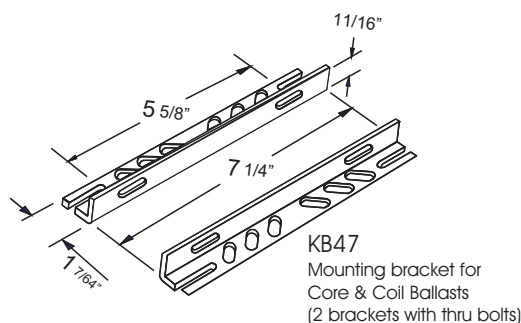

C-01


MOUNTING CLIP for round case (Furnished as standard with B suffix ballast)

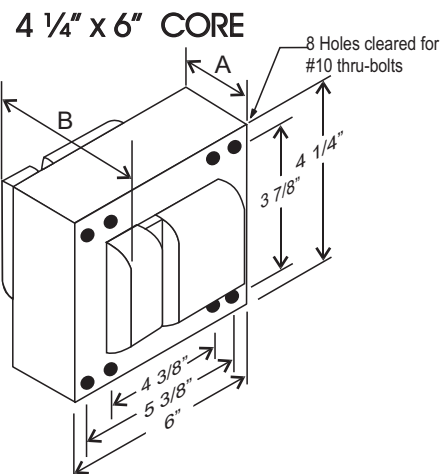


CORE AND COIL

Dimension A (inches)	4.50
Dimension B (inches)	6.15
Weight (Lbs)	33.2
Lead Lengths (inches)	12

CAPACITOR

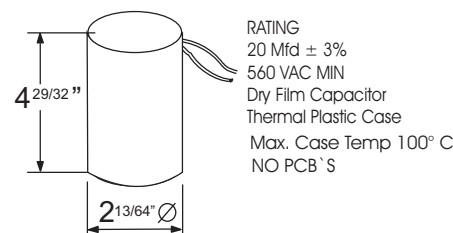

WIRING DIAGRAM

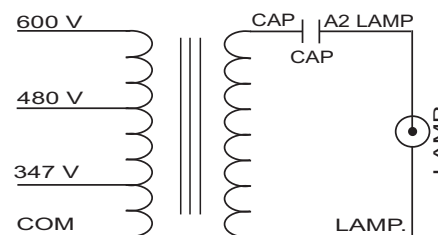

Data is based upon tests performed by Industrias Sola Basic in a controlled environment and representative of relative performance. Actual Performance can vary depending on operating conditions. Specifications are subject to change without notice.

Made in Mexico by Industrias Sola Basic S.A de C.V.