


CATALOG NUMBER: E-MZA0FT39F FOR ONE 35 WATT, M130 METAL HALIDE LAMP

| | |
|-----------------------------|------------------|
| Line Voltage | 120/277V |
| Regulation | |
| Line Volts | +/- 5% |
| Line Watts | +/-10% |
| Frequency | 60 Hz |
| Circuit Type | HX-HPF |
| Power Factor (min) | 90% |
| Insulation Class | A(105°) |
| Min. Ambient Starting Temp. | -20° F or -30° C |

| | | |
|-----------------------------------|-------------|-------------|
| Line Voltage (Volts) | 120 | 277 |
| Line Current (Amps) | | |
| Operating | 0.46 | 0.20 |
| Open Circuit | 1.02 | 0.85 |
| Starting | 0.35 | 0.30 |
| Input Watts (W) | 54 | 54 |
| Open Circuit Voltage (V) | 235 | 235 |
| Drop Out Voltage (V) | 90 | 208 |
| UL(1029) Bench Top Rise | A | A |
| Recommended Fuse (Amps) | 3 | 1 |
| HIGH POTENTIAL TEST (VOLTS) | | |
| 1 Minute | 2000 | |
| 2 Seconds | 2500 | |
| Open Circuit Voltage Test(volts) | 210-270 | |
| Short-Circuit Current Test (Amps) | | |
| Secondary Current | 0.55 - 0.70 | |
| Input Current (Amps) | 0.25 - 0.31 | 0.11 - 0.15 |

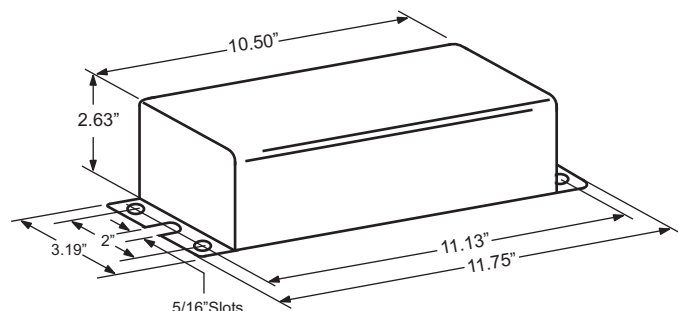


| | |
|-----------------------|-------|
| Weight (Lbs) | 9.00 |
| Lead lengths (Inches) | 12.00 |
| Sound rating | A |

IGNITOR: IN CAN

The ignitor is included as part of the potted assembly.
Ballast to Lamp distance (BTL)= 15 feet.
Temp. Rating: 90° C

WIRING DIAGRAM

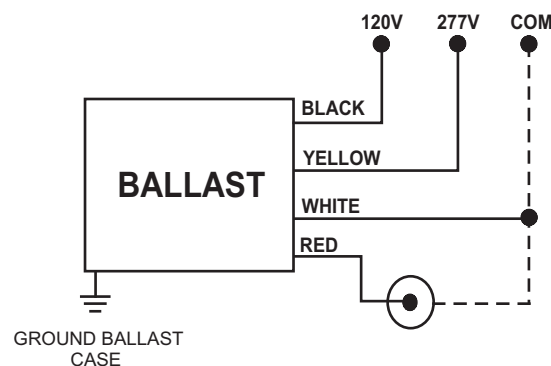

120/277 VOLT CONNECTION

Data is based upon tests performed by Industrias Sola Basic in a controlled environment and representative of relative performance. Actual Performance can vary depending on operating conditions. Specifications are subject to change without notice.



Certificate No. 006281



Made in Mexico by Industrias Sola Basic S.A de C.V.

SOLA CANADA
LIGHTING & POWER

171 Ambassador Drive
Units 8 & 9
Mississauga, ON
L5T 2J1

Phone: 905-670-0746
Fax: 905-670-9689

www.solacanada.com