


CATALOG NUMBER: E-SCA0DD310 FOR ONE 310 WATT, S67 HIGH PRESSURE SODIUM LAMP

Line Voltage	480V
Regulation	
Line Volts	+/- 10%
Line Watts	WITHIN TRAPEZOID
Frequency	60 Hz
Circuit Type	CWA
Power Factor (min)	90%
Insulation Class	H(180°)
Min. Ambient Starting Temp.	-40° F or -40° C

Line Voltage (Volts)	480
Line Current (Amps)	
Operating	0.75
Open Circuit	0.50
Starting	0.55
Input Watts (W)	355
Open Circuit Voltage (V)	185
Drop Out Voltage (V)	300
UL(1029) Bench Top Rise	D
Recommended Fuse (Amps)	2
HIGH POTENTIAL TEST (VOLTS)	
1 Minute	2000
2 Seconds	2500
Open Circuit Voltage Test (volts)	170-205
Short-Circuit Current Test (Amps)	
Secondary Current	4.5 - 5.4
Input Current (Amps)	0.30 - 0.70


4 1/4" x 4 3/4" CORE

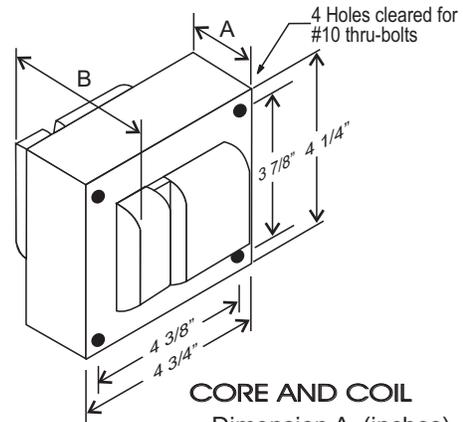

CORE AND COIL

Dimension A (inches)	2.20
Dimension B (inches)	3.80
Weight (Lbs)	14.30
Lead Lengths (inches)	12


CAPACITOR

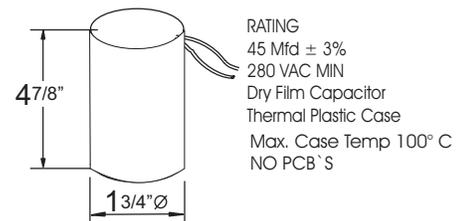

RATING
45 Mfd ± 3%
280 VAC MIN
Dry Film Capacitor
Thermal Plastic Case
Max. Case Temp 100° C
NO PCB'S


IGNITOR 37-63-AS-6.9-N6

Ballast to Lamp Distance (BTL): 2 feet

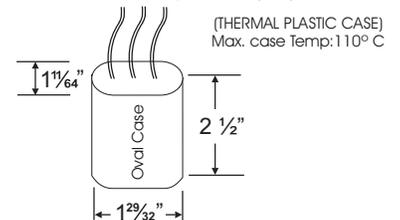

(THERMAL PLASTIC CASE)
Max. case Temp: 110° C

BRACKET CORE & COIL MOUNTING BRACKET

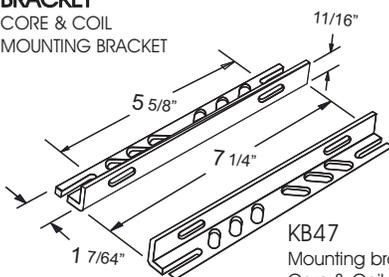

KB47
Mounting bracket for
Core & Coil Ballasts
(2 brackets with thru bolts)




C-01
MOUNTING CLIP for round
case (Furnished as standard
with B suffix ballast)



I-01
MOUNTING CLIP for oval
case (Furnished as standard
with B suffix ballast)

WIRING DIAGRAM



480 VOLT CONNECTION

Data is based upon tests performed by Industrias Sola Basic in a controlled environment and representative of relative performance. Actual Performance can vary depending on operating conditions. Specifications are subject to change without notice.



Certificate No. 006281



Made in Mexico by Industrias Sola Basic S.A de C.V.

SOLA CANADA

LIGHTING & POWER

171 Ambassador Drive
Units 8 & 9
Mississauga, ON
L5T 2J1

Phone: 905-670-0746
Fax: 905-670-9689

www.solacanada.com