



CATALOG NUMBER: E-SCA00W200 FOR ONE 200 WATT, S66 HIGH PRESSURE SODIUM LAMP


Line Voltage	120/208/240/277V
Regulation	
Line Volts	+/- 10%
Line Watts	WITHIN TRAPEZOID
Frequency	60 Hz
Circuit Type	CWA
Power Factor (min)	90%
Insulation Class	H(180°)
Min. Ambient Starting Temp.	-40° F or -40° C

Line Voltage (Volts)	120	208	240	277
Line Current (Amps)				
Operating	1.96	1.13	0.98	0.85
Open Circuit	1.40	0.90	0.70	0.65
Starting	1.24	0.72	0.65	0.54
Input Watts (W)	230	230	230	230
Open Circuit Voltage (V)	182	182	182	182
Drop Out Voltage (V)	75	130	150	175
UL(1029) Bench Top Rise	B	B	A	A
Recommended Fuse (Amps)	6	4	3	3
HIGH POTENTIAL TEST (VOLTS)				
1Minute	2000			
2 Seconds	2500			
Open Circuit Voltage Test(volts)	165-205			
Short-Circuit Current Test (Amps)				
Secondary Current	2.8 - 3.4			
Input Current (Amps)	1.00 - 1.30	0.55 - 0.75	0.50 - 0.65	0.40 - 0.57

BRACKET CORE & COIL MOUNTING BRACKET

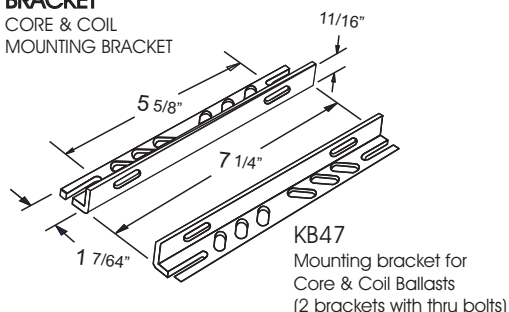


C-01
MOUNTING CLIP for round case (Furnished as standard with B suffix ballast)



I-01
MOUNTING CLIP for oval case (Furnished as standard with B suffix ballast)


4 1/4" x 4 3/4" CORE

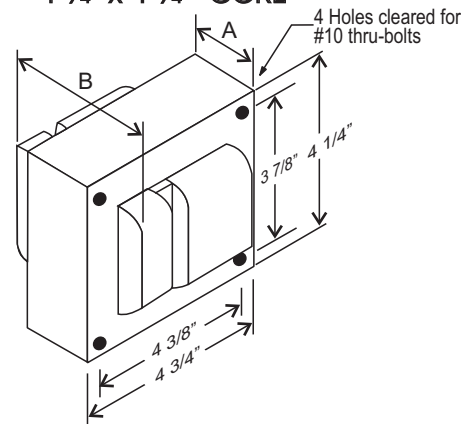

CORE AND COIL

Dimension A (inches)	1.20
Dimension B (inches)	3.00
Weight (Lbs)	9.00
Lead Lengths (inches)	12


CAPACITOR

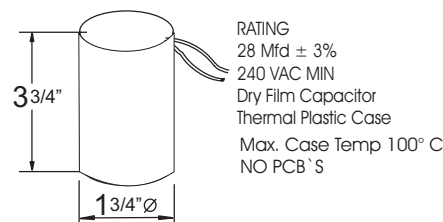

RATING
28 Mfd ± 3%
240 VAC MIN
Dry Film Capacitor
Thermal Plastic Case
Max. Case Temp 100° C
NO PCB'S


IGNITOR 37-63-AS-6.9-N6

Ballast to Lamp Distance (BTL): 2 feet

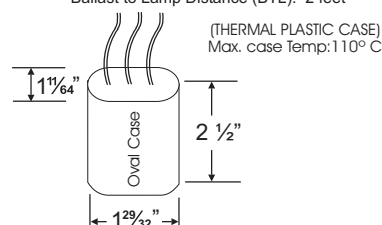

(THERMAL PLASTIC CASE)
Max. case Temp: 110° C

WIRING DIAGRAM

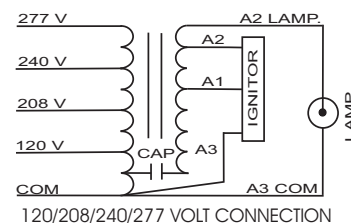

Data is based upon tests performed by Industrias Sola Basic in a controlled environment and representative of relative performance. Actual Performance can vary depending on operating conditions. Specifications are subject to change without notice.



Certificate No. 006281



SOLA CANADA LIGHTING & POWER

171 Ambassador Drive
Units 8 & 9
Mississauga, ON
L5T 2J1

Phone: 905-670-0746
Fax: 905-670-9689

www.solacanada.com