

DESCRIPTION

CATALOG: E-758-F-232-HL	BALLAST TYPE: Electronic	STARTING METHOD: Instant Start	NUMBER OF LAMPS - LAMP TYPE: 2-F17T8, 2-F25T8, 2-F32T8, 2-F32T8/U
-----------------------------------	------------------------------------	--	---

ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE: 120 V~ ±10%	LAMP WATTS: 17/25/32 W	INPUT WATTS: 75 W	INPUT CURRENT: 0.635 A	OCV: 610 V	PF: > 0.97	FREQUENCY: 60 Hz	SOUND RATED: A
MIN START TEMP: 32°F / 0°C	CLASS: P	TYPE: 1 outdoor	BALLAST FACTOR: 1.15	BEF: 1.53	LAMP CONNECTION: PARALLEL	THD (1): < 18%	NO PCB'S

(1) FOR 2-F32T8

PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS						
	UNITS	M1	M2	M3	W	L	H
	INCHES	1.68	8.90	8.34	2.37	9.50	1.50
	TOL(+/-)	0.01	0.01	0.01	0.05	0.05	0.05
	MM	43	226	212	60	241	38
TOL(+/-)	0.25	0.25	0.25	1.30	1.30	1.30	
LEAD LENGTH							
UNITS	BLACK	WHITE	RED	BLUE	BLUE		
INCHES	22	22	36	26	26		
TOL(+/-)	3/8	3/8	3/8	3/8	3/8		
MM	559	559	914	660	660		
TOL(+/-)	10	10	10	10	10		


CARTON CHARACTERISTICS

UNITS/CARTON 10	CARTONS/LAYER 12	# OF LAYERS 8	UNITS/PALLET 960	PIECE WEIGHT 2.5 lbs	CARTON WEIGHT 26 lbs	PALLET WEIGHT 2,573 lbs
CARTONS/PALLET 96	CARTON DIMENSIONS 12" x 12" x 4"		PALLET DIMENSIONS 40" x 48" x 7"		PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET 40" x 48" x 40"	

MISC.

CARTON LABEL

ELECTRICAL DIAGRAM

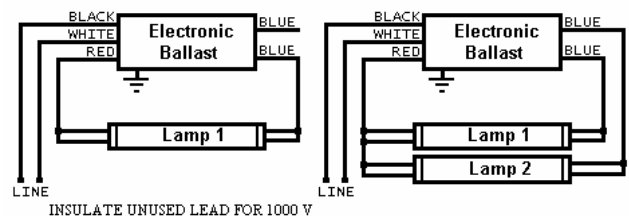

PRODUCT LABEL



ISO 9001:2000



SOLA CANADA
LIGHTING & POWER

171 Ambassador Drive
Units 8 & 9
Mississauga, ON
L5T 2J1

Phone: 905-670-0746
Fax: 905-670-9689

www.solacanada.com

Made in Mexico by Industrias Sola Basic S.A. de C.V.