

DESCRIPTION

CATALOG: E-758-F-232-LP-SC	BALLAST TYPE: Electronic	STARTING METHOD: Instant Start	NUMBER OF LAMPS - LAMP TYPE: 1-F32T8, 1-F32T8/U, 2-F17T8, 2-F25T8, 2-F32T8, 2-F32T8/U
--------------------------------------	------------------------------------	--	---

ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE: 120 V~ ±10%	LAMP WATTS: 17/25/32 w	INPUT WATTS: 51 w	INPUT CURRENT: 0.43 A	OCV: 590 v	PF: > 0.97	FREQUENCY: 60 Hz	SOUND RATED: A
MIN START TEMP: 32°F / 0°C	CLASS: P	TYPE: 1 outdoor	BALLAST FACTOR: 0.75	BEF: 1.47	LAMP CONNECTION: PARALLEL	THD (1): < 20%	NO PCB'S

(1) FOR 2-F32T8

PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS						
	UNITS	M1	M2	M3	W	L	H
	INCHES	1.22	8.90	8.35	1.70	9.50	1.18
	TOL(+/-)	0.01	0.01	0.01	0.05	0.05	0.05
	MM	31	226	212	43	241	30
TOL(+/-)	0.25	0.25	0.25	1.30	1.30	1.30	
LEAD LENGTH							
UNITS	BLACK	WHITE	RED	BLUE	BLUE		
INCHES	22	22	36	26	26		
TOL(+/-)	3/8	3/8	3/8	3/8	3/8		
MM	559	559	914	660	660		
TOL(+/-)	10	10	10	10	10		

CARTON CHARACTERISTICS


UNITS/CARTON 20	CARTONS/LAYER 12	# OF LAYERS 6	UNITS/PALLET 1440	PIECE WEIGHT 1.6 lbs	CARTON WEIGHT 33 lbs	PALLET WEIGHT 2,453 lbs
CARTONS/PALLET 72	CARTON DIMENSIONS 12.75" x 12.00" x 4.50"		PALLET DIMENSIONS 40" x 48" x 7"		PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET 40" x 48" x 36"	

MISC.


CARTON LABEL



ELECTRICAL DIAGRAM

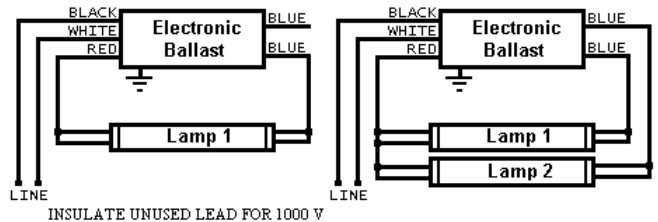

PRODUCT LABEL

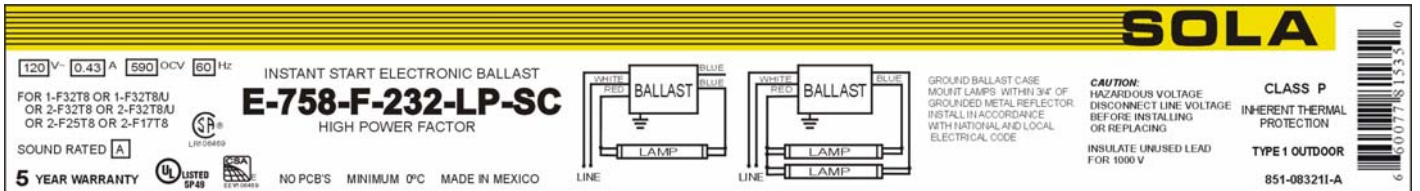

ISO 9001:2000



SOLA CANADA
LIGHTING & POWER

171 Ambassador Drive
Units 8 & 9
Mississauga, ON
L5T 2J1

Phone: 905-670-0746
Fax: 905-670-9689

www.solacanada.com

Made in Mexico by Industrias Sola Basic S.A. de C.V.