

DESCRIPTION


CATALOG: E-758-J-232-SC	BALLAST TYPE: Electronic	STARTING METHOD: Instant Start	NUMBER OF LAMPS - LAMP TYPE: 1-F32T8, 1-F32T8/U, 2-F17T8, 2-F25T8, 2-F32T8, 2-F32T8/U
-----------------------------------	-----------------------------	-----------------------------------	--

ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE: 347 V~ ±10%	LAMP WATTS: 17/25/32 W	INPUT WATTS: 59 W	INPUT CURRENT: 0.175 A	OCV: 650 V	PF: > 0.97	FREQUENCY: 60 Hz	SOUND RATED: A
MIN START TEMP: 32°F / 0°C	CLASS: P	TYPE: 1 outdoor	BALLAST FACTOR: 0.87	BEF: 1.47	LAMP CONNECTION: PARALLEL	THD (1): < 20%	NO PCB'S

(1) FOR 2-F32T8

PHYSICAL CHARACTERISTICS

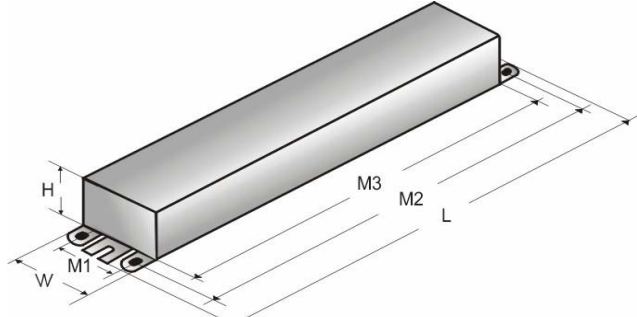	CASE DIMENSIONS						
	UNITS	M1	M2	M3	W	L	H
	INCHES	1.22	8.90	8.35	1.70	9.50	1.18
	TOL(+/-)	0.01	0.01	0.01	0.05	0.05	0.05
	MM	31	226	212	43	241	30
	TOL(+/-)	0.25	0.25	0.25	1.30	1.30	1.30
LEAD LENGTH							
	UNITS	BLACK	WHITE	RED	BLUE	BLUE	
	INCHES	22	22	36	26	26	
	TOL(+/-)	3/8	3/8	3/8	3/8	3/8	
	MM	559	559	914	660	660	
	TOL(+/-)	10	10	10	10	10	

CARTON CHARACTERISTICS

UNITS/CARTON 20	CARTONS/LAYER 12	# OF LAYERS 6	UNITS/PALLET 1440	PIECE WEIGHT 1.6 lbs	CARTON WEIGHT 33 lbs	PALLET WEIGHT 2,453 lbs
CARTONS/PALLET 72	CARTON DIMENSIONS 12.75" x 12.00" x 4.50"	PALLET DIMENSIONS 40" x 48" x 7"	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET 40" x 48" x 36"			

MISC.

--

CARTON LABEL



CAT. E-758-J-232-SC

VOLTAGE 347	0.175 A
60 Hz	UNITS 20

1-F32 T8 OR 1-F32 T8/U
OR
2-F32 T8 OR 2-F32 T8/U
OR
2-F25 T8 OR 2-F17 T8

INSTANT START ELECTRONIC BALLAST

ISO 9001:2000 LR 106469


QMI

CSA EEEV106469

MADE IN MEXICO

5 YEAR WARRANTY NO PCB'S F07

ELECTRICAL DIAGRAM

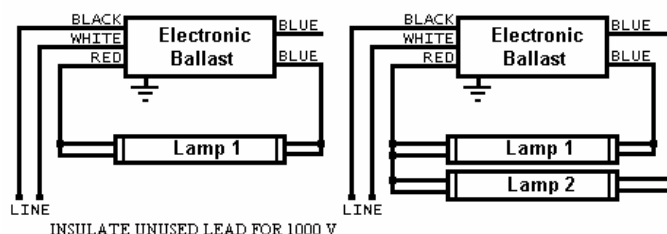

PRODUCT LABEL

SOLA

347 V~ 0.175 A 650 V~ 60 Hz

VOLTAGE TO GROUND <600 V~

FOR 1-F32T8 OR 1-F32T8/U OR 2-F32T8 OR 2-F32T8/U OR 2-F25T8 OR 2-F17T8

SOUND RATED A

5 YEAR WARRANTY NO PCB'S F07

INSTANT START ELECTRONIC BALLAST

E-758-J-232-SC

HIGH POWER FACTOR

MINIMUM 0°C

MADE IN MEXICO

CSA EEEV106469

ISO 9001:2000

QMI REGISTERED

GROUND BALLAST CASE MOUNT LAMPS WITHIN 3/4" OF GROUNDED METAL REFLECTOR. INSTALL IN ACCORDANCE WITH NATIONAL AND LOCAL ELECTRICAL CODES. INSULATE UNUSED LEAD FOR 1000 V.

CAUTION: HAZARDOUS VOLTAGE. DISCONNECT LINE VOLTAGE BEFORE INSTALLING OR REPLACING. MISE EN GARDE: VOLTAGE DANGEREUX. DÉBRANCHER LE COURANT AVANT L'INSTALLATION OU REMPLACEMENT.

CLASS P

INHERENT THERMAL PROTECTION

TYPE 1 OUTDOOR

6 16007780459 100



ISO 9001:2000



SOLA CANADA

LIGHTING & POWER

171 Ambassador Drive
Units 8 & 9
Mississauga, ON
L5T 2J1

Phone: 905-670-0746
Fax: 905-670-9689

www.solacanada.com

Data is based upon tests performed by Industrias Sola Basic in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

Made in Mexico by Industrias Sola Basic S.A. de C.V.