

DESCRIPTION

| | | | |
|--------------------------------|-----------------------------|-----------------------------------|--|
| CATALOG: E-758-J-332 | BALLAST TYPE: Electronic | STARTING METHOD: Instant Start | NUMBER OF LAMPS – LAMP TYPE: 3-F32T8, 3-F32T8/U, 3-F25T8, 3-F17T8 |
|--------------------------------|-----------------------------|-----------------------------------|--|

ELECTRICAL CHARACTERISTICS

| | | | | | | | |
|-------------------------------|---------------------------|----------------------|--------------------------|---------------|------------------------------|---------------------|-------------------|
| INPUT VOLTAGE: 347 V~ ±10% | LAMP WATTS: 17/25/32 w | INPUT WATTS: 88 w | INPUT CURRENT: 0.26 A | OCV: 650 v | PF: > 0.97 | FREQUENCY: 60 Hz | SOUND RATED: A |
| MIN START TEMP: 32°F / 0°C | CLASS: P | TYPE: 1 outdoor | BALLAST FACTOR: 0.87 | BEF: 0.98 | LAMP CONNECTION: PARALLEL | THD (1): < 20% | NO PCB'S |

(1) FOR 3-F32T8

PHYSICAL CHARACTERISTICS

| | CASE DIMENSIONS | | | | | | |
|-------------|-----------------|-------|------|------|------|------|------|
| | UNITS | M1 | M2 | M3 | W | L | H |
| | INCHES | 1.68 | 8.90 | 8.34 | 2.37 | 9.50 | 1.50 |
| | TOL(+/-) | 0.01 | 0.01 | 0.01 | 0.05 | 0.05 | 0.05 |
| | MM | 43 | 226 | 212 | 60 | 241 | 38 |
| TOL(+/-) | 0.25 | 0.25 | 0.25 | 1.30 | 1.30 | 1.30 | |
| LEAD LENGTH | | | | | | | |
| UNITS | BLACK | WHITE | RED | BLUE | BLUE | BLUE | |
| INCHES | 22 | 22 | 46 | 26 | 26 | 26 | |
| TOL(+/-) | 3/8 | 3/8 | 3/8 | 3/8 | 3/8 | 3/8 | |
| MM | 559 | 559 | 1168 | 660 | 660 | 660 | |
| TOL(+/-) | 10 | 10 | 10 | 10 | 10 | 10 | |

CARTON CHARACTERISTICS


| | | | | | | |
|----------------------|-------------------------------------|-------------------------------------|--|-------------------------|-------------------------|----------------------------|
| UNITS/CARTON 10 | CARTONS/LAYER 12 | # OF LAYERS 8 | UNITS/PALLET 960 | PIECE WEIGHT 2.5 lbs | CARTON WEIGHT 26 lbs | PALLET WEIGHT 2,573 lbs |
| CARTONS/PALLET 96 | CARTON DIMENSIONS 12" x 12" x 4" | PALLET DIMENSIONS 40" x 48" x 7" | PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET 40" x 48" x 40" | | | |

MISC.

CARTON LABEL



ELECTRICAL DIAGRAM

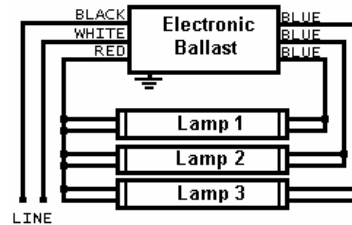

PRODUCT LABEL

| | | | | |
|--|----------|---|-------------------------------|---|
| 347V - 0.260A 650 OCV 60 Hz VOLTAGE TO GROUND <math>< 600</math> V- FOR 3-F32T8 OR 3-F32T8/U OR FOR 3-F25T8 OR 3-F17T8 | | INSTANT START ELECTRONIC BALLAST E-758-J-332 HIGH POWER FACTOR | | CLASS P INHERENT THERMAL PROTECTION TYPE 1 OUT DOOR 851-08300I-A |
| SOUND RATED A 5 YEAR WARRANTY | LR106469 | NO PCB'S MADE IN MEXICO | MINIMUM 0°C MADE IN MEXICO | CAUTION: HAZARDOUS VOLTAGE BEFORE INSTALLING OR REPLACING |



Data is based upon tests performed by Industrias Sola Basic in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

Made in Mexico by Industrias Sola Basic S.A. de C.V.

ISO 9001:2000



SOLA CANADA

LIGHTING & POWER

171 Ambassador Drive
 Units 8 & 9
 Mississauga, ON
 L5T 2J1

Phone: 905-670-0746
 Fax: 905-670-9689

www.solacanada.com