


CATALOG NUMBER: E-SZA0DD150 FOR ONE 150 WATT, S55 HIGH PRESSURE SODIUM LAMP


Line Voltage	480V
Regulation	
Line Volts	+/- 5%
Line Watts	WITHIN TRAPEZOID
Frequency	60 Hz
Circuit Type	HX-HPF
Power Factor (min)	90%
Insulation Class	H(180°)
Min. Ambient Starting Temp.	-40° F or -40° C

Line Voltage (Volts)	480
Line Current (Amps)	
Operating	0.44
Open Circuit	0.80
Starting	0.50
Input Watts (W)	188
Open Circuit Voltage (V)	120
Drop Out Voltage (V)	384
UL(1029) Bench Top Rise	E
Recommended Fuse (Amps)	2
HIGH POTENTIAL TEST (VOLTS)	
1 Minute	2000
2 Seconds	2500
Open Circuit Voltage Test(volts)	110-135
Short-Circuit Current Test (Amps)	
Secondary Current	3.6 - 4.6
Input Current (Amps)	0.25 - 0.40

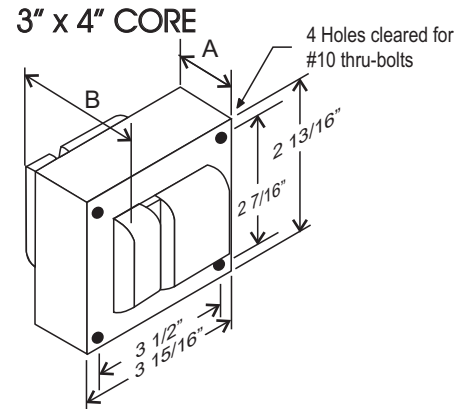


CORE AND COIL	
Dimension A (inches)	3.00
Dimension B (inches)	4.00
Weight (Lbs)	9.00
Lead Lengths (inches)	12

CAPACITOR

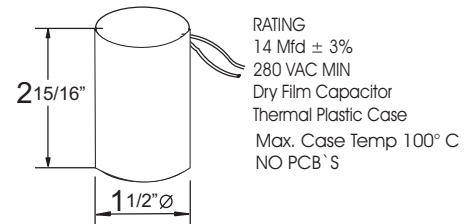


RATING
14 Mfd ± 3%
280 VAC MIN
Dry Film Capacitor
Thermal Plastic Case
Max. Case Temp 100° C
NO PCB'S


BRACKET CORE & COIL MOUNTING BRACKET

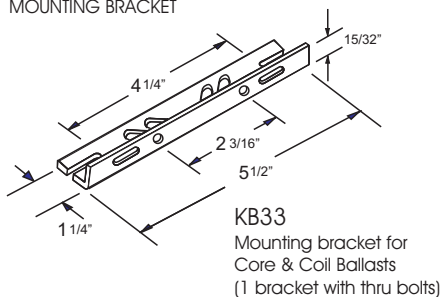

KB33
Mounting bracket for
Core & Coil Ballasts
(1 bracket with thru bolts)




C-01
MOUNTING CLIP for round
case (Furnished as standard
with B suffix ballast)



I-01
MOUNTING CLIP for oval
case (Furnished as standard
with B suffix ballast)


IGNITOR 37-63-AS-9.1-N7

Ballast to Lamp Distance (BTL): 2 feet

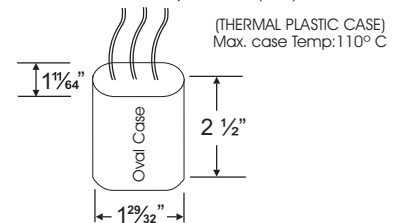

(THERMAL PLASTIC CASE)
Max. case Temp: 110° C

WIRING DIAGRAM

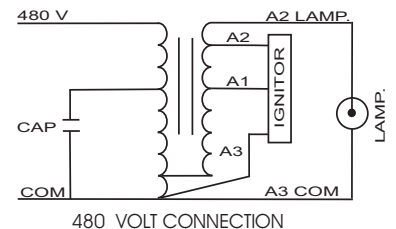

Data is based upon tests performed by Industrias Sola Basic in a controlled environment and representative of relative performance. Actual Performance can vary depending on operating conditions. Specifications are subject to change without notice.



Certificate No. 006281



SOLA CANADA

LIGHTING & POWER

171 Ambassador Drive
Units 8 & 9
Mississauga, ON
L5T 2J1

Phone: 905-670-0746
Fax: 905-670-9689

www.solacanada.com