
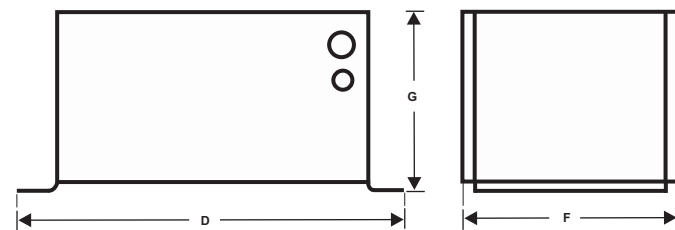


### CATALOG NUMBER: E-MIAJDDZ4002S-ID3 2 X 400 WATT, M59 METAL HALIDE LAMP

Line Voltage	347/480/600V
Regulation	
Line Volts	+/-10%
Lamp Watts	+/-10%
Frequency	60 Hz
Circuit Type	CWI
Power Factor (min)	90%
Insulation Class	H(180°)
Min. Ambient Starting Temp.	-20° F or -30° C

Line Voltage (Volts)	347	480	600
Line Current (Amps)			
Operating	2.60	1.90	1.50
Open Circuit	2.04	1.55	1.19
Starting	1.51	1.10	0.89
Input Watts (W)	890	890	890
Open Circuit Voltage (V)	600	600	600
Drop Out Voltage (V)	180	250	310
UL(1029) Bench Top Rise			
Recommended Fuse (Amps)	8	5	4
HIGH POTENTIAL TEST (VOLTS)			
1 Minute	2200		
2 Seconds	2700		
Open Circuit Voltage Test(volts)	545-635		
Short-Circuit Current Test (Amps)			
Secondary Current	3.5 - 4.0		
Input Current (Amps)	1.24 - 1.60	0.89 - 1.16	0.72 - 0.93

#### DIMENSIONAL DATA

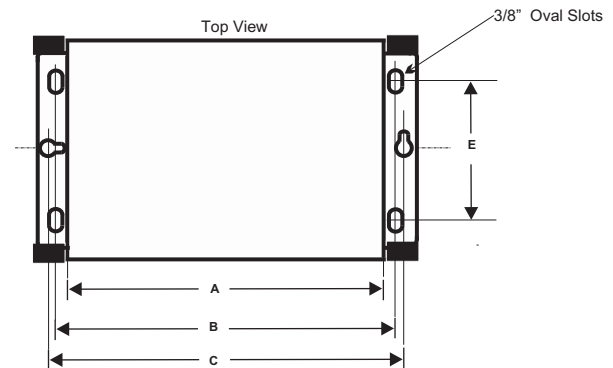


#### DIMENSIONAL REFERENCE

A	B	C	D	E	F	G
17.4"	18.0"	18.8"	19.8"	3.3"	7.5"	6.0"

#### CAPACITOR

The Capacitor is included as part of the potted assembly.

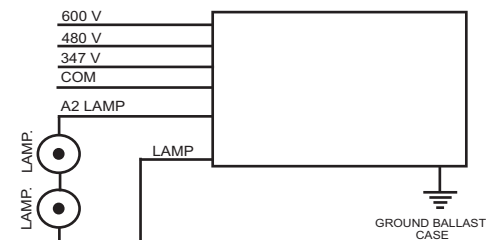

MULTI VOLTAGE  
347/480/600 VOLT CONNECTION

ISO 9001:2000



Data is based upon tests performed by Industrias Sola Basic in a controlled environment and representative of relative performance. Actual Performance can vary depending on operating conditions. Specifications are subject to change without notice.

## SOLA CANADA

### LIGHTING & POWER

171 Ambassador Drive  
Units 8 & 9  
Mississauga, ON  
L5T 2J1

Phone: 905-670-0746  
Fax: 905-670-9689

www.solacanada.com

Made in Mexico by Industrias Sola Basic S.A de C.V.