

DESCRIPTION

CATALOG: E420-F-234-SW		STARTING METHOD: Rapid Start	INPUT VOLTAGE: 120 V~	OCV: 280 V~	FREQUENCY: 60 Hz
BALLAST TYPE: Energy efficient magnetic	CLASS: P	TYPE: 1 outdoor	LAMP CONNECTION: Series	SOUND RATED: A	NO PCB'S

ELECTRICAL CHARACTERISTICS

LAMP TYPE	NUMBER OF LAMPS	LAMP WATTS	MIN. START TEMP. (°F/°C)	INPUT WATTS (Watts)	INPUT CURRENT (Amps)	BALLAST FACTOR	B.E.F.	P.F.	THD %	LAMP CREST FACTOR
F40T12	2	40	50/10	87	0.74	0.93	1.065	0.98	12	1.6
F40T12/ES	2	34	60/16	73	0.65	0.88	1.205	0.94	16	1.8
F40T12/U	2	40	50/10	87	0.74	0.93	1.060	0.98	12	1.6
F40T12/U/ES	2	34	60/16	74	0.66	0.89	1.200	0.93	16	1.8
F40T10	2	40	50/10	88	0.75	0.94	1.066	0.98	14	1.6

PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS						
	UNITS	M1	M2	M3	W	L	H
	INCHES	1.687	8.906	8.344	2.375	9.5	1.5
	TOL(+/-)	0.010	0.010	0.010	0.050	0.050	0.050
	MM	43	226	212	60	241	38
	TOL(+/-)	0.25	0.25	0.25	1.30	1.30	1.30
LEAD LENGTH							
UNITS	BLACK	WHITE	RED	BLUE	YELLOW		
INCHES	22	22	26	26	36		
TOL(+/-)	3/8	3/8	3/8	3/8	3/8		
MM	559	559	600	600	914		
TOL(+/-)	10	10	10	10	10		

CARTON CHARACTERISTICS

UNITS/CARTON: 10	CARTON/LAYER: 12	# OF LAYERS: 5	UNITS PALLET: 600	PIECE WEIGHT: 3.5 lbs	CARTON WEIGHT: 36 lbs	PALLET WEIGHT: 2 195 lbs
CARTON PALLET: 60	CARTON DIMENSIONS: 12" x 12" x 4"	PALLET DIMENSIONS: 40" x 48" x 7"	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET: 40" x 48" x 27"			


MISC.

Shrink Wrapped Individual Units.

CARTON LABEL

PRODUCT LABEL

ELECTRICAL DIAGRAM

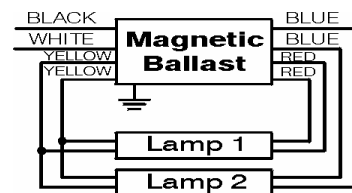

SOLA CANADA

LIGHTING & POWER

171 Ambassador Drive
Units 8 & 9
Mississauga, ON
L5T 2J1

Phone: 905-670-0746
Fax: 905-670-9689

www.solacanada.com

Data is based upon tests performed by Industrias Sola Basic in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

Made in Mexico by Industrias Sola Basic S.A. de C.V.

Certificate No. 006281