

### DESCRIPTION

<b>CATALOG:</b> E420-J-134-TP	<b>STARTING METHOD:</b> Rapid Start	<b>INPUT VOLTAGE:</b> 347 V~	<b>OCV:</b> 220 V~	<b>FREQUENCY:</b> 60 Hz
<b>BALLAST TYPE:</b> Energy efficient magnetic	<b>CLASS:</b> P	<b>TYPE:</b> 1 outdoor	<b>LAMP CONNECTION:</b> Series	<b>SOUND RATED:</b> A
<b>NO PCB'S</b>				

### ELECTRICAL CHARACTERISTICS

LAMP TYPE	NUMBER OF LAMPS	LAMP WATTS	MIN. START TEMP. (°F/°C)	INPUT WATTS (Watts)	INPUT CURRENT (Amps)	BALLAST FACTOR	B.E.F.	P.F.	THD %	LAMP CREST FACTOR
F40T12	1	40	50/10	52	0.15	0.93	1.790	0.98	8	1.6
F40T12/ES	1	34	60/16	46	0.13	0.91	1.975	0.99	12	1.7
F40T12/U	1	40	50/10	51	0.15	0.92	1.800	0.98	9	1.6
F40T12/U/ES	1	34	60/16	46	0.13	0.91	1.975	0.99	12	1.7
F40T10	1	40	50/10	52	0.16	0.94	1.805	0.94	10	1.6
F30T12	1	30	50/10	45	0.13	0.94	2.085	0.99	11	1.7
F30T12/ES	1	25	60/16	41	0.15	0.92	2.240	0.98	16	1.8

### PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS						
	UNITS	M1	M2	M3	W	L	H
	INCHES	1.687	8.906	8.344	2.375	9.5	1.5
	TOL(+/-)	0.010	0.010	0.010	0.050	0.050	0.050
MM	43	226	212	60	241	38	
TOL(+/-)	0.25	0.25	0.25	1.30	1.30	1.30	
LEAD LENGTH							
UNITS	BLACK	WHITE	RED	BLUE	YELLOW		
INCHES	22	22	26	36			
TOL(+/-)	3/8	3/8	3/8	3/8			
MM	559	559	600	914			
TOL(+/-)	10	10	10	10			

### CARTON CHARACTERISTICS

<b>UNITS/CARTON</b> 10	<b>CARTON/LAYER</b> 12	<b># OF LAYERS</b> 5	<b>UNITS PALLET</b> 600	<b>PIECE WEIGHT</b> 3.5 lbs	<b>CARTON WEIGHT</b> 36 lbs	<b>PALLET WEIGHT</b> 2 195 lbs
<b>CARTON PALLET</b> 60	<b>CARTON DIMENSIONS</b> 12" x 12" x 4"		<b>PALLET DIMENSIONS</b> 40" x 48" x 7"	<b>PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET</b> 40" x 48" x 27"		


### MISC.

Shrink Wrapped Individual Units.


#### CARTON LABEL



#### ELECTRICAL DIAGRAM

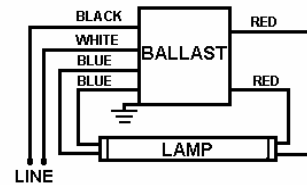

#### PRODUCT LABEL

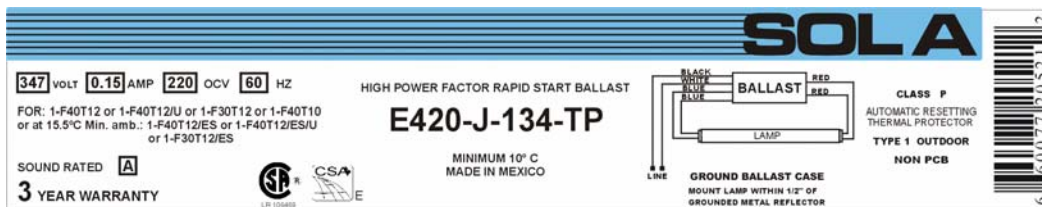

Certificate No. 006281

## SOLA CANADA

### LIGHTING & POWER

171 Ambassador Drive  
Units 8 & 9  
Mississauga, ON  
L5T 2J1

Phone: 905-670-0746  
Fax: 905-670-9689

www.solacanada.com

Data is based upon tests performed by Industrias Sola Basic in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

Made in Mexico by Industrias Sola Basic S.A. de C.V.