


## Technical Data Sheet for HID Indoor Enclosed Ballasts



**SOLA Canada  
 Indoor Enclosed Ballast  
 Electrical Data  
 Model #: EMIAJDDZ2x250-ID  
 For 2 M58/H37 250W Lamps**

LineVoltage	347/480/600V		
Regulation			
LineVolts	+/-10%		
LineWatts	+/-10%		
Frequency	60Hz		
CircuitType	CWI		
PowerFactor(min)	90%		
InsulationClass	H(180°)		
Min. Ambient StartingTemp.	-20°F or -30° C		
Line Voltage(Volts)	347	480	600
Line Current (Amps)			
Operating	0.90	0.65	0.52
Open Circuit	0.72	0.52	0.41
Starting	0.30	0.22	0.18
Input Watts (W)	292	292	292
Open Circuit Voltage(V)	300	300	300
Drop Out Voltage(V)	190	260	315
UL(1029)Bench TopRise	C	C	C
Recommended Fuse(Amps)	3	2	2
<b>HIGH POTENTIAL TEST (VOLTS)</b>			
1 Minute	2000		
2 Seconds	2500		
Open Circuit Voltage Test (volts)	275-325		
<b>Short-Circuit Current Test (Amps)</b>			
Secondary Current	2.3-2.6		
Input Current (Amps)	0.16-	0.12-	0.10-
	0.30	0.22	0.17

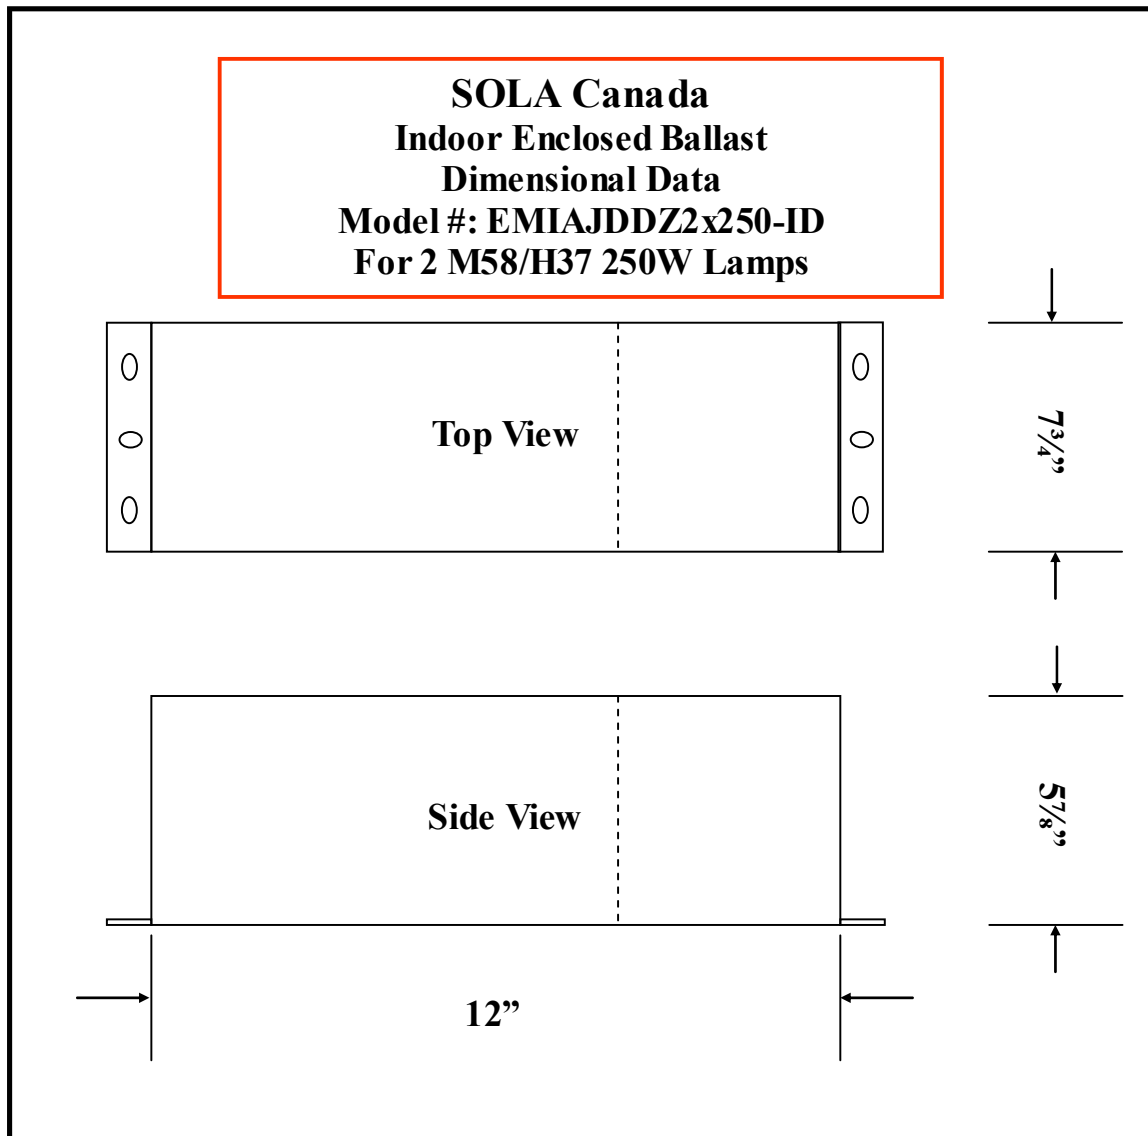