

DESCRIPTION

CATALOG: ERSF-220-60-TP		STARTING METHOD: Trigger Start		INPUT VOLTAGE: 120 V~		OCV: 220 V~		FREQUENCY: 60 Hz			
BALLAST TYPE: Normal Power Factor			CLASS: P		TYPE: 1 outdoor		LAMP CONNECTION: Series		SOUND RATED: A		NO PCB'S

ELECTRICAL CHARACTERISTICS

LAMP TYPE	NUMBER OF LAMPS	LAMP WATTS	MIN. START TEMP. (°F/°C)	INPUT WATTS (Watts)	INPUT CURRENT (Amps)	BALLAST FACTOR	B.E.F.	P.F.	THD %	LAMP CREST FACTOR
F20T12	2	20	50/10	41	0.47	0.58	1.414	0.74	7	1.5
F15T12	2	15	50/10	46	0.57	0.65	1.413	0.68	7	1.5
F14T12	2	14	50/10	47	0.60	0.70	1.489	0.65	6	1.5
F15T8	2	15	50/10	47	0.57	0.65	1.382	0.68	7	1.5
F14T8	2	14	50/10	47	0.60	0.70	1.489	0.64	6	1.6

PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS						
	UNITS	M1	M2	M3	W	L	H
	INCHES	1.687	6.00	5.440	2.375	6.560	1.500
	TOL(+/-)	0.010	0.010	0.010	0.050	0.050	0.050
	MM	43	152	138	60	166	38
	TOL(+/-)	0.25	0.25	0.25	1.30	1.30	1.30
LEAD LENGTH							
UNITS	BLACK	WHITE	RED	BLUE	YELLOW		
INCHES	12	12	20	20	36		
TOL(+/-)	3/8	3/8	3/8	3/8	3/8		
MM	304	304	508	508	914		
TOL(+/-)	10	10	10	10	10		

CARTON CHARACTERISTICS

UNITS/CARTON 24	CARTON/LAYER 9	# OF LAYERS 4	UNITS PALLET 864	PIECE WEIGHT 2.8 lbs	CARTON WEIGHT 67.5 lbs	PALLET WEIGHT 2 465 lbs
CARTON PALLET 36	CARTON DIMENSIONS 14" x 10 5/8" x 6 1/8"		PALLET DIMENSIONS 40" x 48" x 7"		PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET 40" x 48" x 31 1/2"	

MISC.

--


CARTON LABEL



PRODUCT LABEL



ELECTRICAL DIAGRAM

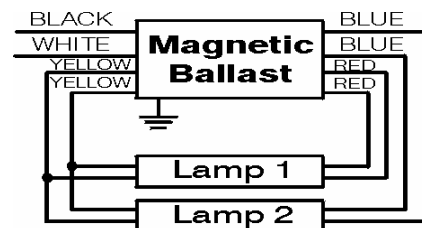

Data is based upon tests performed by Industrias Sola Basic in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

Made in Mexico by Industrias Sola Basic S.A. de C.V.



Certificate No. 006281

SOLA CANADA

LIGHTING & POWER

171 Ambassador Drive
Units 8 & 9
Mississauga, ON
L5T 2J1

Phone: 905-670-0746
Fax: 905-670-9689

www.solacanada.com