


Technical Data Sheet for HID Outdoor Weatherproof Ballasts

SOLA Canada
Outdoor Weatherproof Enclosed Ballast
Dimensional Data
Model #: EMIAFRM250-OD1
For 250W M58/H37 Metal Halide / MV Lamps

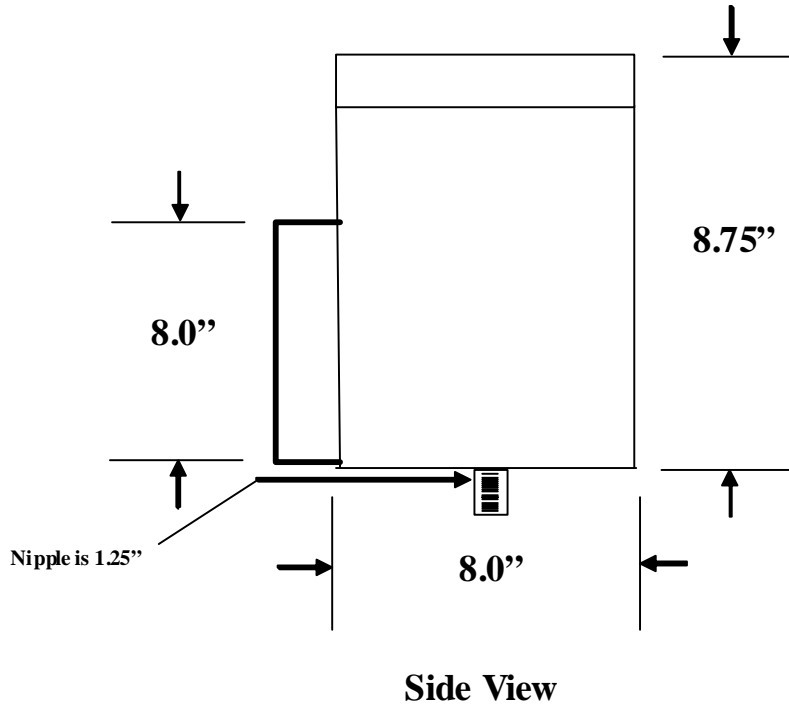

SOLA Canada
Outdoor Weatherproof Enclosed Ballast
Dimensional Data
Model #: EMIAFRM250-OD1
For 250W M58/H37 Metal Halide / MV Lamps

Line Voltage	120/208/240V		
Regulation			
Line Volts	+/-10%		
Lamp Watts	+/-10%		
Frequency	60 Hz		
Circuit Type	CWI		
Power Factor (min)	90%		
Insulation Class	H(180°)		
Min. Ambient Starting Temp.	-20° F or -30° C		
Line Voltage (Volts)	120	208	240
Line Current (Amps)			
Operating	2.60	1.50	1.30
Open Circuit	1.91	1.10	1.0
Starting	0.92	0.53	0.46
Input Watts (W)	292	292	292
Open Circuit Voltage (V)	300	300	300
Drop Out Voltage (V)	60	105	125
UL(1029) Bench Top Rise	E	C	C
Recommended Fuse (Amps)	5	3	3
HIGH POTENTIAL TEST (VOLTS)			
1 Minute	2000		
2 Seconds	2500		
Open Circuit Voltage Test(volts)	275-325		
Short-Circuit Current Test (Amps)			
Secondary Current	2.3-2.6		
Input Current (Amps)	0.52 -	0.30 -	0.25 -
	0.90	0.52	0.45



Wiring Diagram

