

DESCRIPTION

CATALOG: E450-F-160-TP-SW		STARTING METHOD: Instant Start	INPUT VOLTAGE: 120 V~	OCV: 620 V~	FREQUENCY: 60 Hz
BALLAST TYPE: Energy efficient magnetic	CLASS: P	TYPE: 1 outdoor	LAMP CONNECTION: Series	SOUND RATED: B	NO PCB'S

ELECTRICAL CHARACTERISTICS

LAMP TYPE	NUMBER OF LAMPS	LAMP WATTS	MIN. START TEMP. (°F/°C)	INPUT WATTS (Watts)	INPUT CURRENT (Amps)	BALLAST FACTOR	B.E.F.	P.F.	THD %	LAMP CREST FACTOR
F96T12	1	75	50/10	101	0.90	0.93	0.920	0.94	27	1.8
F96T12/ES	1	60	60/16	87	0.78	0.93	1.068	0.93	29	1.8
F84T12	1	70	50/10	90	0.80	0.88	0.977	0.94	29	1.8
F72T12	1	55	0/-18	85	0.76	0.94	1.105	0.93	26	1.8
F64T12	1	52	0/-18	78	0.70	0.90	1.153	0.93	28	1.8
F60T12	1	50	0/-18	73	0.66	0.84	1.150	0.92	28	1.8

PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS						
	UNITS	M1	M2	M3	W	L	H
	INCHES	2.0	11.140	10.5	3.109	11.750	1.7815
	TOL(+/-)	0.010	0.030	0.010	0.050	0.100	0.080
	MM	283	267	79	298	45	
	TOL(+/-)	0.25	0.80	0.25	1.30	2.50	2.00
	LEAD LENGTH						
UNITS	BLACK	WHITE	RED	BLUE	YELLOW		
INCHES	8	48		48			
TOL(+/-)	3/8	3/8		3/8			
MM	203	1219		1219			
TOL(+/-)	10	10		10			

CARTON CHARACTERISTICS

UNITS/CARTON: 6	CARTON/LAYER: 12	# OF LAYERS: 4	UNITS PALLET: 288	PIECE WEIGHT: 8 lbs	CARTON WEIGHT: 49 lbs	PALLET WEIGHT: 2 391 lbs
CARTON PALLET: 48	CARTON DIMENSIONS: 12" x 12" x 4"		PALLET DIMENSIONS: 40" x 48" x 7"		PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET: 40" x 48" x 24"	


MISC.

Shrink Wrapped Individual Units; Use Cut-Out Lamp Holders.

CARTON LABEL



ELECTRICAL DIAGRAM

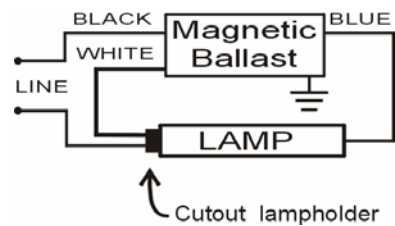

PRODUCT LABEL



171 Ambassador Drive
Units 8 & 9
Mississauga, ON
L5T 2J1

Phone: 905-670-0746
Fax: 905-670-9689
www.solacanada.com

Made in Mexico by Industrias Sola Basic S.A. de C.V.

Certificate No. 006281